

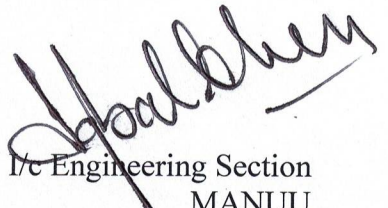



## NOTICE INVITING QUOTATION

Sealed item rate quotations are invited for “Construction of RCC platform with SS sinks, in School of Sciences at MANUU Campus, Gachibowli, Hyderabad” to reach the office of the I/c Engineering Section, Room No.16 Ground floor, Admin Building MANUU Gachibowli, Hyderabad.

Notice Inviting Quotation No. 19	MANUU/ENGG/2025-26/F112(sos) date 23-09-2025
Type of Tender/Form of Contract/ Bidding	Open/ Works Contract/
Name of Work	For Construction of RCC platform with SS sinks in School of Sciences at MANUU Campus, Gachibowli, Hyderabad
Estimated Amount	Rs 2,70,766.85
Earnest Money Deposit (EMD)	Rs 5,400/- ( i.e. 2% of the estimated amount (DD/Bank Guarantee in favour of Finance Officer, MANUU payable at Hyderabad)
Performance Guarantee	5% of the Contract value (DD/Bank Guarantee in favour of Finance Officer, MANUU payable at Hyderabad)
Date of start of Bid Submission	23 -09-2025 @ 11:00 AM
Last date & Time for submission of Bids	30 -09-2025 @ 11:00 AM

Blank quotation form can be downloaded from the MANUU website.

  
I/c Engineering Section  
MANUU  




SCHEDULE OF QUANTITIES

Name of Work:		Construction of RCC platform with SS sinks in School of Sciences at MANUU Campus, Gachibowli, Hyderabad			
No:		MANUU/ENGG/2025-26/F			
DSR No		Units	Qty	Rate	Amount
6.4	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level in all shapes and sizes in :				
6.4.2	Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum	2		
13.1	12 mm cement plaster of mix :				
13.1.2	1:6 (1 cement: 6 fine sand)	sqm	45		
5.16	Providing, transporting, hoisting and fixing above plinth level up to floor five level precast reinforced cement concrete in shelves, including setting in cement mortar 1:3 (1 cement : 3 coarse sand), cost of required centering, shuttering and finishing with neat cement punning on exposed surfaces but, excluding the cost of reinforcement, with 1:1.5:3 (1 cement : 1.5 coarse sand (zone-III) derived from natural sources : 3 graded stone aggregate 20 mm nominal size derived from natural sources ).	Cum	0.5		
5.3 A	Reinforced cement concrete work in beams, suspended floors, roofs having slope up to 15° landings, balconies, shelves, chajjas, lintels, bands, plain window sills, staircases and spiral stair cases above plinth level up to floor five level, excluding the cost of centering, shuttering, finishing and reinforcement with 1:1.5:3 (1 cement : 1.5 coarse sand including manufactured sand derived from Recycled Concrete Aggregate (RCA) upto 20% : 3 graded stone aggregate 20 mm nominal size including Recycled Concrete Aggregate (RCA) upto 20%).	cum	1		
5.9	Centering and shuttering including strutting, propping etc. and removal of form for :				
5.9.3	Suspended floors, roofs, landings, balconies and access platform	Sqm	12		
5.22A	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level.				
5.22A.6	Thermo-Mechanically Treated bars of grade Fe-500D or more.	kg	250		
11.21	Providing and fixing 10 mm thick acid and/or alkali resistant tiles of approved make and colour using acid and/or alkali resisting mortar bedding, and joints filled with acid and/or alkali resisting cement as perish : 4457, complete as per the direction of Engineer-in- Charge.				
11.21.1	In flooring on a bed of 10 mm thick mortar 1:4 (1 acid proof cement : 4 coarse sand).				
11.21.1.1	Acid and alkali resistant tile.	Sqm	18		



DSR No	Description of Work	Unit	Qty	Rate	Amount
17.10	Providing and fixing Stainless Steel A ISI 304 (18/8) kitchen sink as per IS:13983 with C.I. brackets and stainless steel plug 40 mm, including painting of fittings and brackets, cutting and making good the walls wherever required :				
17.10.2.1	610x510 mm bowl depth 200 mm.	No.	5		
17.28	Providing and fixing P.V.C. waste flexible pipe of 40mm dia for sink or wash basin including P.V.C. waste fittings complete.				
17.28.2.2	40 mm dia (Flexible pipe)	each	5		
NSR-1	Providing and fixing at all floors Type-B SWR PVC pipes including all fittings such as plain and door bends,tees,elbows,equal and unequal junctions,heel rest sanitary bends,collars etc.(except floor traps/p traps) confirming to IS 13592,IS 14735 including jointing with solvent and providing necessary supports,clamps/MS brackets at special jointing in exposed areas like in shafts etc. and pasted type(solvent) for all other locations all complete and as per the directions of Engineer-in-charge.				
NSR-1.2	75mm diameter	metre	45		
13.8	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	sqm	15		
13.82	Wall painting with acrylic emulsion paint, having VOC (Volatile Organic Compound ) content less than 50 grams/ litre, of approved brand and manufacture, including applying additional coats wherever required,to achieve even shade and colour.				
13.82.2	Two coats	sqm	20		
8.31	Providing and fixing Ist quality ceramic glazed wall tiles conforming to IS: 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge, in skirting, risers of steps and dados, over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm, including pointing in white cement mixed with pigment of matching shade complete.	sqm	30		
18.21	Providing and fixing uplasticised PVC connection pipe with brass unions :				
18.21.2	45 cm length				
18.21.2	15 mm nominal bore	each	5		



DSR No	Description of work	Unit	Qty	Rate	Amount
18.53	Providing and fixing C.P. brass angle valve for basin mixer and geyser points of approved quality conforming to IS:8931				
18.53.1	15mm nominal bore	each	5		
18.8	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings, i/c fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and the cost of cutting chases and making good the same including testing of joints complete as per direction of Engineer in Charge.				
	Concealed work, including cutting chases and making good the walls etc.				
18.8.3	25 mm nominal outer dia Pipes	metre	75		
18.5	Providing and fixing C.P. brass long nose bib (Snaw Neck type )cock of approved quality conforming to IS standards and weighing not less than 810 gms.				
18.50.1	15 mm nominal bore	each	5		
Total(excl GST)					
Add GST					
Total (incl of GST)					
(Total amount in words .....					
				Sd/- I/c Engineering Section	

Signature of Contractor



Details of the Contractor

S.No.	Particulars	To be filled by the Contractor
1	Name of the Firm	
2	Name of the Contractor	
3	Contractor Address	
(a)	Mobile	
(b)	E-Mail Id	
4	Name of the Bank	
5	Name of the Branch	
6	Account No.(prefix with zeros, if any as given on the cheque book/passbook)	
7	IFSC Code of the Branch	
8	MICR Code	
9	PAN No.	
10	GST No.	
11	State whether Terms & Conditions mentioned in the Quotation are accepted ? Yes/No	
12	Is EMD submitte/attached ? Yes/No	

I/we undertake and confirm that our firm/partnership firm has not been blacklisted by any state/Central Departments/PSUs/Autonomous bodies during its operations. Further, if such information comes to the notice of the University then I/we shall be liable for appropriate action as per the provisions laid down by the University or Govt. of India.

Signature of Contractor



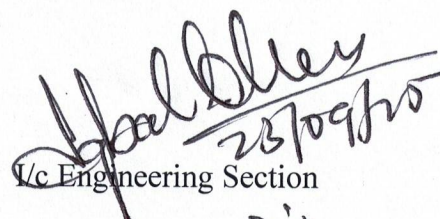
## Terms and Conditions

1. The work should be carried out strictly as per the specification and as per the directions of Engineer-in-charge.
2. Safety measures as specified in CPWD general conditions of contract should be adopted to protect the labour from every risk specifically while executing the work.
3. Before tendering, the contractor shall inspect site of work on all working days from 09:00 AM to 05:00 PM and shall fully acquaint himself about the conditions prevailing at site, availability of materials in market, availability of ready site and suitable locations for execution of the work involved in achieving the completion of work.
4. The contractor shall at his own expense and risk arrange the storage of materials at site of the work for carrying out of all jobs connected with the completion of the work. The contractor shall have to abide by the regulations of the authorities concerned and the directions of the I/c Engineering Section. If during construction, it becomes necessary to remove or shift the equipment, material, etc, to facilitate execution, the contractor shall carry out the removal of shifting as directed by the I/c Engineering Section and re-shift to its original position and no claim whatsoever, shall be entertained on this account.
5. It shall be deemed that the contractor has satisfied himself as to the nature and location of the work, transport facilities, availability of site, etc. the department will bear no responsibility for lack of such knowledge & the consequences thereof.
6. The I/c Engineering Section shall have full powers for removal of any or all of the materials brought to site by contractor which are not in accordance with the contract specifications or do not conform, in character or quality. In case of default on the part of the contractor in removing rejected materials, the I/c Engineering Section shall be at liberty to have them removed at the risk and cost of the contractor.
7. The work shall be carried out in such a manner so as not to interfere / or adversely / or disturb the functioning of the University and other works being executed by other agencies, if any.
8. Any damage done by the contractor to any existing work or work being executed by other agencies shall be made good by him at his own cost.
9. The contractor shall maintain in good condition all work executed till the completion of entire work entrusted to the contract under this contract.
10. No payment shall be made to the contractor for damage caused by rain, flood and other natural calamities whatsoever during the execution of works and any damage to the work on this account shall have to be made good by the contractor at his own cost.
11. The Contractor shall take instructions from the I/c Engineering Section regarding collections and stacking of materials at site.
12. The Contractor shall be responsible to arrange at his own cost all necessary tools and tackles required for execution of the works including incidental original and maintenance works.
13. The operating cost of contractor's machinery at site i.e. Coolants/ lubricants/ Petrol/ Kerosene Oil/ Mobile Oil/ etc, if any shall be borne by the contractor himself.
14. The University shall not be responsible for any injury partial or permanent or death of any workers at site due to accident or malfunctioning of the equipment or by negligence of the Contractors staff on site.
15. If any damage caused for public conveniences/ services, the same shall have to be repaired instant, failing which necessary recovery shall be make from the bill.
16. If any Building, Road and Channels damaged by the Contractor the same shall have to be repair by the Contractor at his risk and cost, otherwise the complete cost will be recovered as intimated by the I/c Engineering Section.



17. The rate quoted by the contractor shall include all incidental expenses if nay.
18. No extra payment what so ever shall be paid to the contractor other than the quoted price.
19. Verbal quotation or incomplete quotation will be rejected.
20. Any variation in the specification(s) during repair/servicing will be rejected.
21. Time allowed is 30 days and starts from the date of issue of Work Order. In case of delay in completion of the contract, Liquidate damages (LD) at one percent of the contract value per week of delay subject to a maximum of ten percent of contract value shall be levied.
22. The work shall be carried out to the entire satisfaction of the I/c Engineering Section.
23. Payment shall be made on submission of Invoice after satisfactory execution of the work and as per actual measurements
24. The tax as applicable shall be deducted from the gross amount of the bill.
25. The performance security will be forfeited and credited to the MANUU account in the event of a breach of contract by the contractor. However it shall be refunded to the contractor without interest after duly performs and complete all obligations.
26. The Security Deposit @ 2.5 percent on contract value shall be deducted and shall be refund on completion of Defect Liability Period.

-000-

  
I/c Engineering Section  
23/09/20  
23